Bell 8S

ORIGINALITY DESIGN SMART – AND BEAUTIFUL

DOOR BELL

QUICK GUIDE

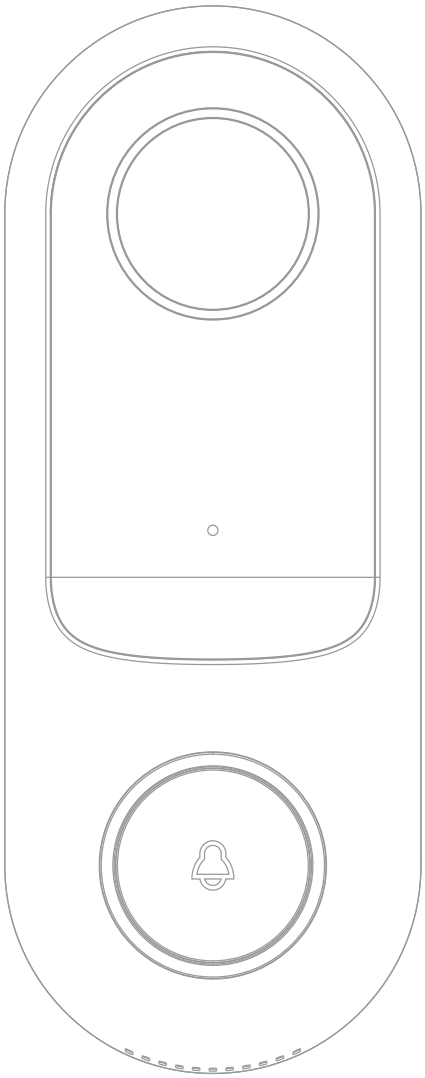

What's in the box

Please consult this checklist for all parts.

Bell 8S

Angle Wall Mount



Chime kit



Screw(4 kinds)



Pin



Screwdriver



Manual

3M

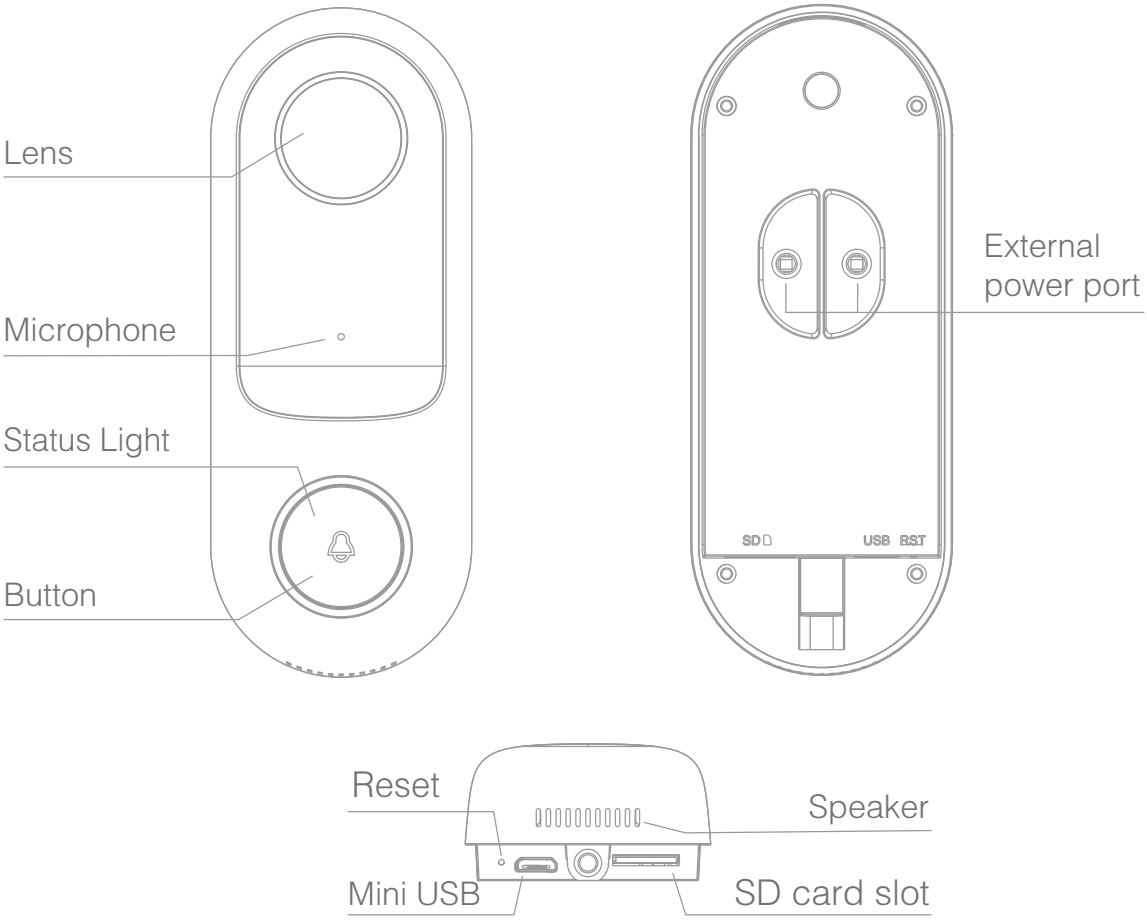

Description

Power Port	AC 12V~24V
Doorbell button	Press the button to activate the doorbell
Status light	• Red light solids on: the camera or network is abnormal • Red light blinking: awaiting WiFi connection, or currently connecting (faster blinking) • Blue light solids on: camera running correctly
Microphone	Captures sound for your video
SD card slot	Supports local SD Card storage (Max.128G)
Reset	Press and hold on for 5 seconds with pin to reset the doorbell (unable to unbind the bell from account)

Install

Mode 1 Doorbell General Installation



1.Mark screws position



2.Nail expansion screw



3.Fix bracket



4.Install the doorbell into the bracket

Mode 2 Angle Wall Mount + bracket + doorbell installation



1.Mark screws position



2.Nail expansion screw



3.Fit the mounting bracket to the Angle Wall Mount



4.Fix bracket





5.Install the doorbell into the bracket

Connect

Download

CloudEdge is available for both iOS and Android OS. Search the name 'CloudEdge'in App Store or Android Market, or scan upper QR–Code to download the App.

- Support

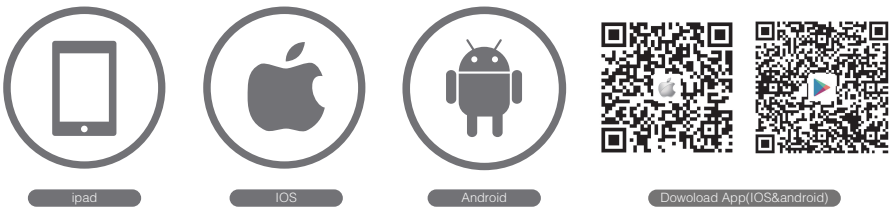

Set up router

This product only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.

Registration process

Step 1 Open the CloudEdge App, click 'SIGN UP', input a valid email address and select 'registration means agreement with user agreement privacy agreement' then click 'NEXT'.

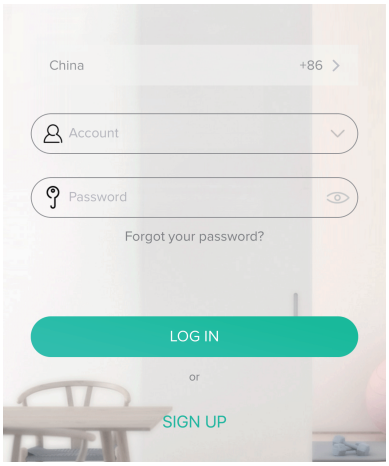

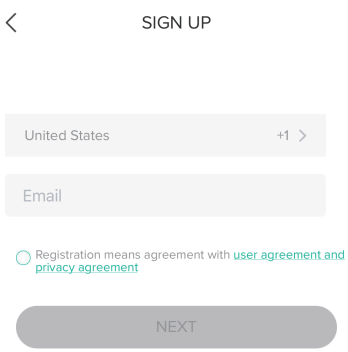

Step 2 Enter the email address and click 'OK', create a nickname and login password.

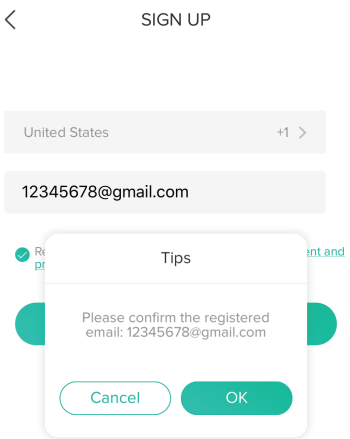

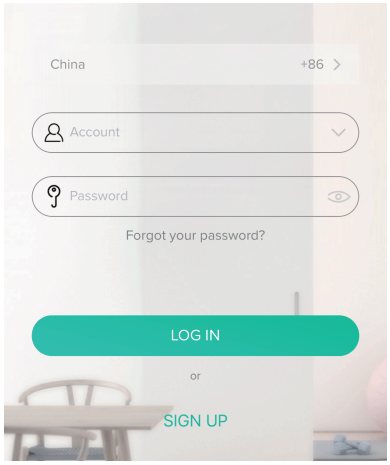

Note: Make sure your router, device, and mobile phone are nearby.

QR Code Configuration

Few notices before adding the device

1. This device only supports 2.4GHz WiFi router, please make sure you are using a 2.4GHz WiFi router.
2. Please follow the instructions and make sure the password is inputed correctly.
3. One device can only be added with one App account, if the device has been added with another account already, then it can’ t be added to any another account again.

Process

Step 1 Open the CloudEdge App, click '+', and select the type of device to add.

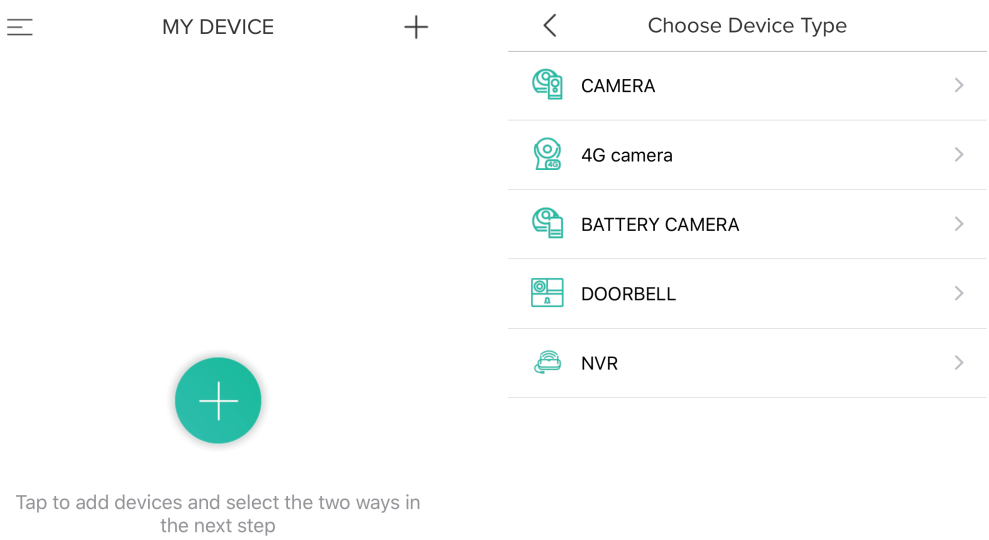

Step 2 Please confirm the red LED light blinks, select 'The device has flashed red slowly or you hear a tone', click 'Next'. Then input the wireless password, click 'Next'.

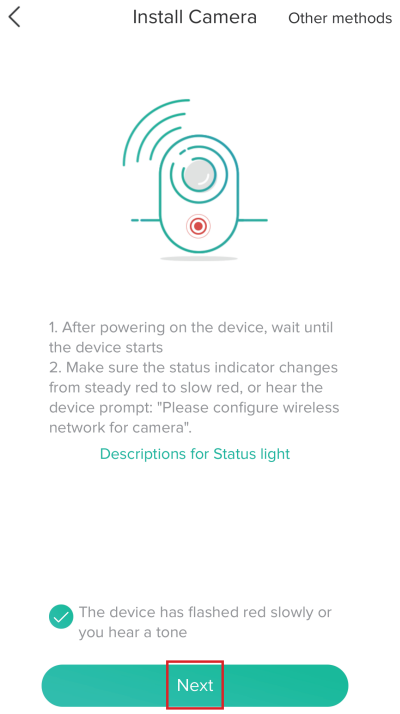

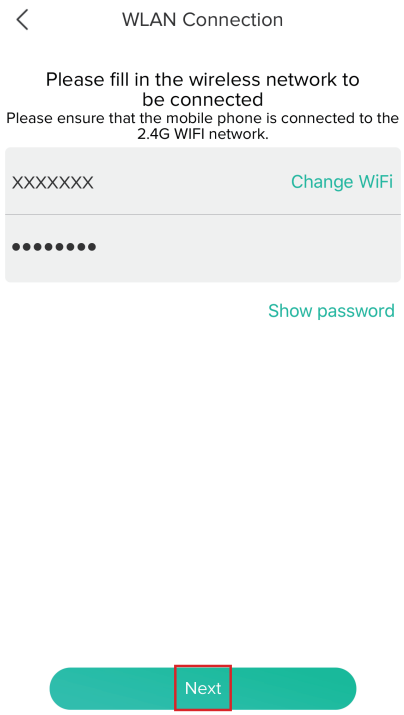

Step 3 The device is scanning the QR code at a distance of 15~25cm (you can click the 'operation' to view the scanning mode). After the device scans successfully, click 'Hear tone'.

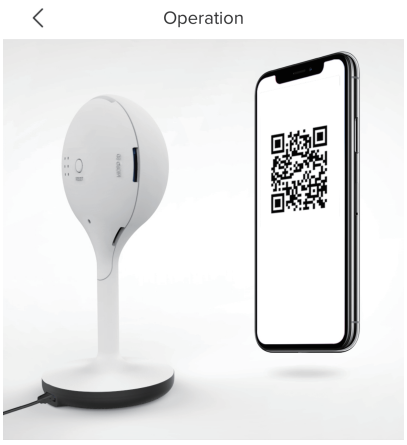

Please point the QR code in the screen of the mobile phone towards the device and keep the distance of about 15~25cm. Wait for the device to scan the QR code on the mobile phone.

Step 4 The device is successfully connected to the network. After the configuration is completed, the App automatically adds the successfully scanned device, and return to the device list. The configuration is completed.

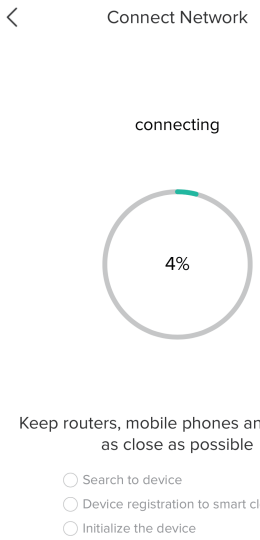

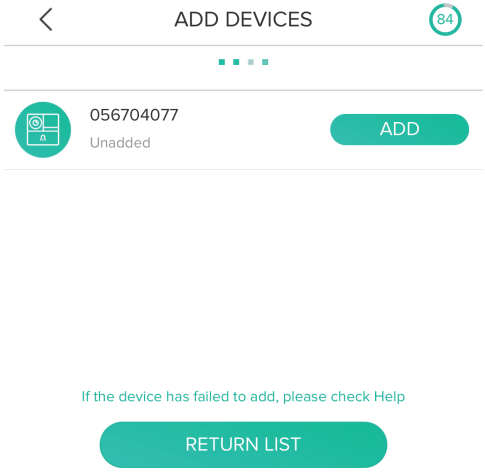

Step 5 Click the play button to complete the preview. (Remind: long press the image to be previewed to remove the device, add device again to reset the device)

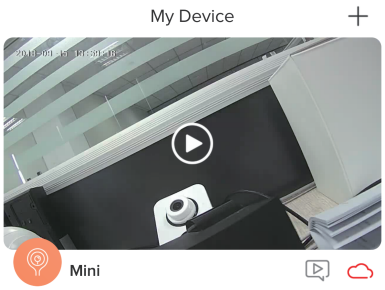

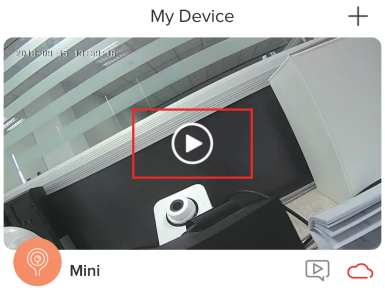

Functions

Full–duplex audio

When the visitor push the doorbell button, you will get a call. You can see and hear the vistor in your App from the doorbell if you answer.

Motion detection

Motion sensors will notify you when movement is detected.

Shared device

The doorbell device can be shared with friends, and friends can also preview online. There is no limit to the number of sharing devices, but only 6 accounts are supported for online preview at the same time.

Record

Record every moment using high capacity SD card storage.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.

Daytime

Night

FAQ

Q: The camera cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, if not, it is better to reset the camera and add it again.

Q: Why is it still in the list of devices after reseting?

A: The reseted camera only resets the network configuration of the camera, but cannot change the configuration in the App, remove the camera in your account,need to add again.

Q: How to cut the camera network to other router?

A: First remove and reset the camera in your App account and then configure your camera again by the App.

Q: Why doesn't the camera identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can’t be identified when the internet environment is not good.

Q: Why I can’t get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened;Message notification and authority confirmation in the mobile phone system have been opened.