


Snap 9S

ORIGINALITY DESIGN SMART - AND BEAUTIFUL

.....



QUICK GUIDE

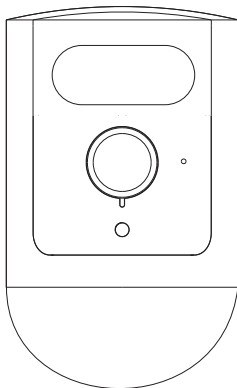

What's in the box

Please consult this checklist for all parts.



Snap 9S



Power adapter



USB cable



Bracket(A)



Screws X2



Manual




Bracket(B)



Bracket(C)

Description

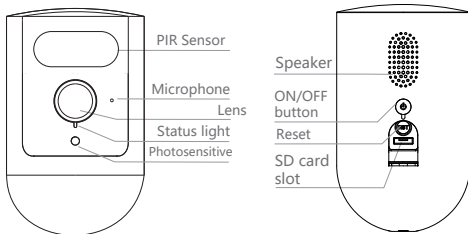

Power Port DC 5V±10%

Power on/off Press the button for 3 seconds to turn on/off the camera

Status light


- Solid red light on: network is malfunctional
- Blinking red light: wait for network connection (slowly)
connecting the network (fast)
- Solid blue light on: the camera is working correctly

SD card slot Support local SD Card storage (Max.128GB)

Reset Press and hold on for 5 seconds to reset the camera


Battery 6700mAh (Two 18650 lithium-ion batteries)

Mode 1 Bracket (A) and Bracket (C) Installation

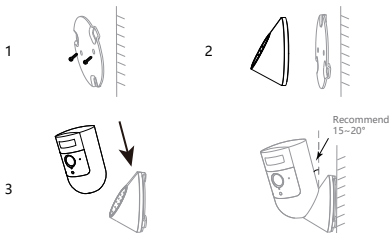

1. Fix the bracket (C) on the wall with screws.
2. Connect the bracket (A) to the bracket (C), through the magnetic attraction of the bracket (A) itself.
3. Connect the camera to the bracket (A), through the magnetic attraction of themselves.

Mode 2 Bracket (B) Installation

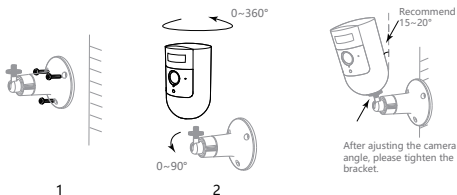

1. Fix the bracket (B) on the wall with screws.
2. Install the camera to the bracket and then tighten the bracket.

Download

CloudEdge is available for both iOS and Android OS. Search the name 'CloudEdge' in App Store or Google Play, or scan the QR-Code to download the App.

Support



Add device

Log in the CloudEdge, select "Add Device", and add the smart camera to the App according to the screen tips(Make the smart camera close to the router when configuring).



NOTE: If you need to re-select the WiFi network, please press and hold the "RESET" button for 5 seconds, the device will restart, and the indicator will be flashing red.

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?

A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?

A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Functions

Remote wake-up

The camera will be in a sleep mode to save power; you can have a preview in App to wake up the camera remotely.

Half-duplex audio

When you see a visitor from the live view of camera, you can send voice message to the visitor or receive voice message from the visitor by your App function.

PIR

When someone passes by, an alarm will be triggered and sent to your phone.

Low battery alarm

You can set a low-battery alarm threshold in your phone App. The threshold is set to a minimum of 10% and a maximum of 50%. When the battery power of the camera is lower than the set threshold, the App will have a reminder.

Record

Using SD card or Opening the Cloud-Storage Service, to keep recording for every moment.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.



Daytime



Night