


Mini 5S

ORIGINALITY DESIGN SMART - AND BEAUTIFUL

.....



QUICK GUIDE

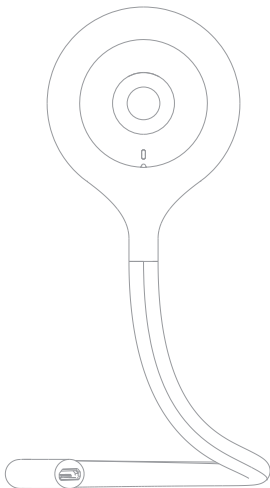

What's in the box

Please consult this checklist for all parts.



Mini 5S(with T&H sensor)



Power adapter



USB cable



Adhesive tape




Bracket



Manual



Screws(2 kinds)

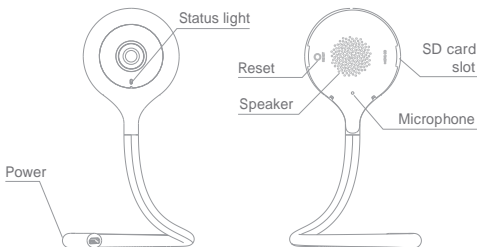

Description

Power DC5V \pm 10%

Status light

- Red light solids on: the camera network is abnormal
- Blinking red light: awaiting WiFi connecting
- Blue light solids on: camera running correctly
- Blinking blue light: currently connecting

Microphone Captures sounds for your video

SD card slot Supports local SD Card storage (Max.128G)


Reset Press and hold the 'reset' for 5 seconds to reset the device(if you have modified settings, they will return to factory defaults)

Install


- 1 You can position the tail any way you like, it's your call!



- 2 Fix the camera on a clean surface with the bracket(the bracket can be fixed by screws or adhesive tape)




Step 1 Use the marker to draw the positions of the 2 screw holes on the wall surface to be installed.




Step 2 Screw 2 expansion screws into the newly marked position.



or



Step 3 Fix the mounting bracket to the wall.

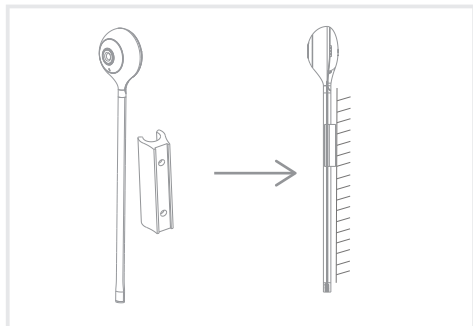

Step 3 Insert the Mini 5C into the stand from any angle.

Connect

Download

Smart Life is available for both iOS and Android OS. Search the name 'Smart Life' in App Store or Android Market, or scan upper QR - Code to download the App.

• Support



iOS



Android



Download App(iOS&Android)

Set up router

This device only supports 2.4GHz frequency band router, does not support 5GHz frequency band router, please set the relevant parameters of the router before WiFi configuration, WiFi passwords do not include special characters such as ~!@#\$\$%^&*(). When the device is configured in WiFi, the mobile phone and device are as close as to the router, which can speed up the configuration of the device.




Please keep network available



Registration process

- Step 1 Open the Smart Life App, click "Register", read the "Privacy Policy" and click "Agree" .



Update date: 2018.4
Come into force date: 2018.5

So you have purchased our Smart LifeSmart device hardware and are starting to use the Smart LifeSmart device software and all its functionalities! Any information you share with us (e.g. for creating a Smart Life Account) will help us to provide you with services related to Smart LifeSmart device and to improve them to make them even better. We explain here our ways of collecting and using information, and how we protect your privacy. In this privacy policy, "personal data" means information that can be used to identify an individual, either from that information alone, or from that information and other information we have access to about that individual. We collect both personal and non-personal data to enable and facilitate the best user experience possible.

What information is collected and how do we use it?

Disagree

Agree

- Step 2 input a legal and valid Mobile number or Email address and click "Continue". Input Verification Code, then log in the app.

Register

Canada +1 >

Mobile number/Email

Continue

☒ I agree with Service Agreement and Privacy Policy

Verification Code

Verification code has been sent to: admin@gmail.com,
Resend (5G)


QR Code Configuration

Getting started



1. Please follow the instructions and make sure the passwords are inputted correctly.
2. One device can only be added with one App account, if the device has been added with another account already, then it can't be added to any another account again.
3. The device will be unbind from previous account after been deleted from App. Further, the device will be resetted automatically once from blue light to red light.

Process

- Step 1 Open the Smart Life App, click "+" or "Add Device". Then select "All" on the "Select Device Type" page.

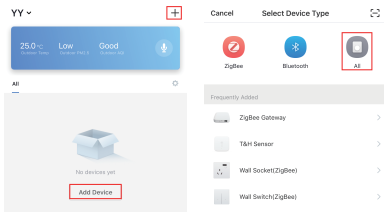

- Step 2 Select "Security Camera". Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard.




Power the device on and make sure the indicator is flashing quickly or a prompt tone is heard

[How to set the indicator with a prompt tone](#)

next step


Step 3 Input WiFi passwords and click "Confirm", scan the QR Code with a device. (You can change the network connection)




About 20cm



Step 4 Click "I heard the beep" when the device comes out "dong dong dong". And you can complete the configuration about 30s.

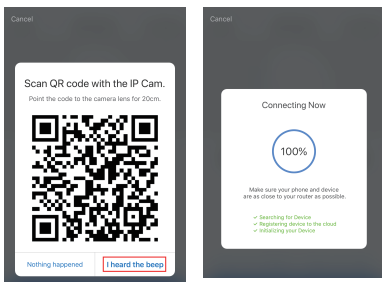

Step 5 The device is added, and the device nickname can also be changed in this interface.

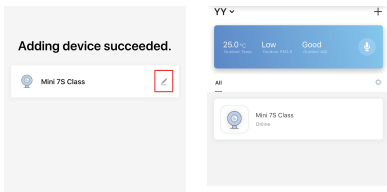

Q: The device cannot be previewed properly?

A: Check whether the network is normal, you can place the camera close to the router, and if not, it is recommended to reset the device and add it again.

Q: Why is it still in the list of devices after resetting?

A: The reset device only resets the network configuration of the camera, but cannot change the configuration on the App, remove the camera, and must be deleted by the App.

Q: How to cut the camera network to another router?

A: First remove and reset the device on the App and then configure the device again by the App.

Q: Why doesn't the device identify the SD card?


A: It is recommended to plug in SD card after power cut. Confirm whether the SD card is normally available and the format is FAT32. And the TF card can't be identified when the internet environment is not good.

Q: Why I can't get the notifications with my cell phone App?


A: Please confirm that the App has been running on the phone, and the relevant reminder function has been opened; Message notification and authority confirmation in the mobile phone system have been opened.

Temperature & humidity sensor

Step 1 Connect temperature and humidity sensors and Mini 5C together.(The interface is connected via USB)

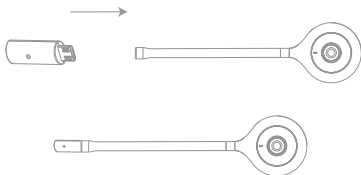

Step 2 Start the device and read the temperature and humidity of the current environment on the App after adding.



Functions

Video flip

Flip your video stream vertically anytime for maximum flexibility.

Temperature and humidity sensors

See your room's temperature and humidity via our app. (Please plug the temperature and humidity sensor into the device's tail section)

Motion detection

Motion sensors will notify you when movement is detected.

Record

Record every moment using high capacity SD card storage.

Day & Night

Powerful night vision means no interruptions, even in complete darkness.



Daytime



Night